VIRTUAL ON™

factsheet:
Transparent OLED Screen Displays

180°

Screen	
Display Size	55inch
Backlight Type	OLED
Display resolution	1920*1080
Display ratio	16 : 9
Luminance	200-600cd/㎡ automatically adjust
Contrast ratio	150000 : 1
Viewing angle	178°/178
Response time	1ms(Gray To Gray)
Color Depth	10bit(R),1.07 billon colors
Touch Function (optional)	
Touch Points	10 touch point
PC/Media Player (optional)	
Windows/Android	Customised
Ports	
Input port	USB*1 + HDMI*1 +DP*1+RS232*1
Output port	RS232*1
Power parameters	
Power input	AC 100-240V~50Hz
Power consumption	＜190W
Operating environment	
Operating time	7*12h（dynamic images
Unit life span	30000h
Operating Temp.	0℃~40
Operating Hum.	20%~80%
Structure	
Material	Alum. profile+Temp. glass+Sheet metal
External Dimension	1225.5*798*220(mm)
Packaging Size	2000*580*1110（mm
Installation Method	Base installation
N.W./G.W.	58.1KG/139KG
Accessories List	
Power & HDMI cable, Remote cont., Qualification Cert., Warranty Card	
Others	
After-sale service	One year warranty

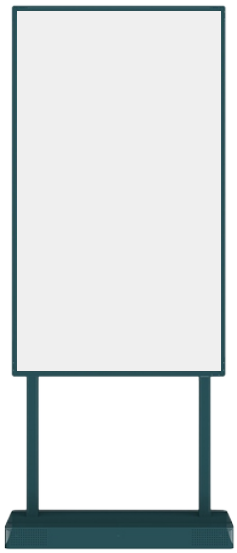

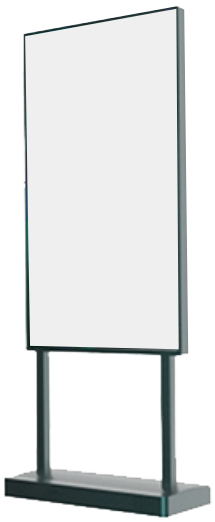

Screen	
Display Size	55inch
Backlight Type	OLED
Display resolution	1920*1080
Display ratio	16 : 9
Luminance	200-600cd/㎡ automatically adjust
Contrast ratio	150000 : 1
Viewing angle	178°/178
Response time	1ms(Gray To Gray)
Color Depth	10bit(R),1.07 billon colors
Touch mode	
Capacitive touch	10-point capacitive touch
PC/Media Player (optional)	
Windows/Android	Customised
Ports	
Input port	USB*1 + HDMI*1 +DP*1+RS232*1
Output port	RS232*1
Power parameters	
Power input	AC 100-240V~50Hz
Power consumption	＜190W
Operating environment	
Operating time	7*12h (dynamic images
Unit life span	30000h
Operating Temp.	0℃~40
Operating Hum.	20%~80%
Structure	
Material	Alum. profile+Temp. glass+Sheet metal
External Dimension	1809.9*757*307(mm)
Packaging Size	2040*560*1100(mm)
Installation Method	Base installation
N.W./G.W.	45KG/120KG
Accessories List	
Power & HDMI cable, Remote cont., Qualification Cert., Warranty Card	
Others	
After-sale service	One year warranty

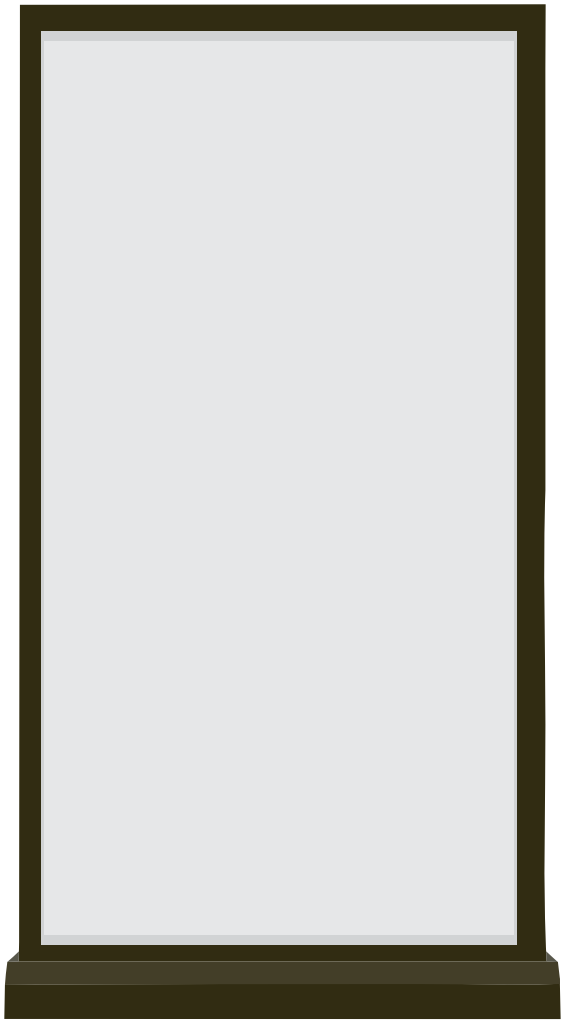

Transparent display	
Display size	77 inch
Backlight type	OLED
Display resolution	3840*2160
Display scale	16 : 9
Brightness	200-600cd/㎡ automatic adjustment
contrast	200000： 1
Viewing angle	178°/178
Response time	1ms(Gray To Gray)
Color depth	10bit(R),1.07 billon colors
Configure the system	
Operation	Windows
CPU	I5 CPU
Memory	16G
Storage	512G
Operating system	Windows 10
Power Battery Parameters	
Power input	AC 100-240V
Consumption	＜600W
Work environment	
Runtime	7*12h (dynamic playback)
Service life	30000h
Operating temperature	0℃~40℃
Humidity	20%~80%
Structure	
Material	Toughened Glass & sheet metal
Dimensions	1972* 1040*597(mm)
Package Size	TBD
Installation method	Base mounting
NET weight/gross weight	TBD
List of attachments	
Power cable, antenna, remote control, certificate warranty card, charger	
other	
After-sales service	Warranty of one year

Screen	
Display Size	30 inch
Backlight Type	OLED
Display resolution	1366*768
Display ratio	16 : 9
Luminance	200-600cd/㎡ automatic regulation
Contrast ratio	135000 : 1
Viewing angle	178°/178
Response time	0.1ms(Gray To Gray)
Color Depth	10bit(R),1.07 billon colors
Configuration system (Optional features, standard single display	
Input port	USB*1 + HDMI*1 +DP*1+RS232*1
Output port	RS232*1
Touch mode	
Capacitive touch	10-point capacitive touch
PC/Media Player (optional)	
Windows/Android	Customised
Power supply parameters	
Power input	AC 100-240V
Power Consumption	＜120W
Operating environment	
Operating time	7*12h (dynamic images
Unit life span	30000h
Operating Temp.	0℃~40
Operating Hum.	20%~80%
Structure	
Material	Aluminum profile+Tempered glass
External Dimension	606*1589*296(mm)
Packaging Size	1820*710*1030(mm)
Installation Method	Base installation
N.W./G.W.	35KG/99KG
Accessories List	
Power & HDMI cable, Remte cont., Qualification Certificate, Warranty Card	
Others	
After-sales service	One year warranty

Screen	
Display Size	55inch
Backlight Type	OLED
Display resolution	1920*1080
Display ratio	16 : 9
Luminance	200-600cd/㎡ automatically adjust
Contrast ratio	150000 : 1
Viewing angle	178°/178
Response time	1ms(Gray To Gray)
Color Depth	10bit(R),1.07 billon colors
Ports	
Input port	USB*1 + HDMI*1 +DP*1+RS232*1
Output port	RS232*1
Touch mode	
Capactive touch	10-point capacitive touch
PC/Media Player (optional)	
Windows/Android	Customised
Power parameters	
Power input	AC 100-240V~50Hz
Power consumption	＜190W
Operating environment	
Operating time	7*12h （dynamic images
Unit life span	30000h
Operating Temp.	0℃~40
Operating Hum.	20%~80%
Structure	
Material	Tempered glass+Sheet metal
External Dimension	1303*1636.13*691.5(mm)
Packaging Size	1480*860*1950 （mm
Installation Method	Base installation
N.W./G.W.	82KG/TBD
Accessories List	
Power & HDMI cable, Remote cont., Qualification Certificate, Warranty Card	
Others	
After-sale service	One year warranty

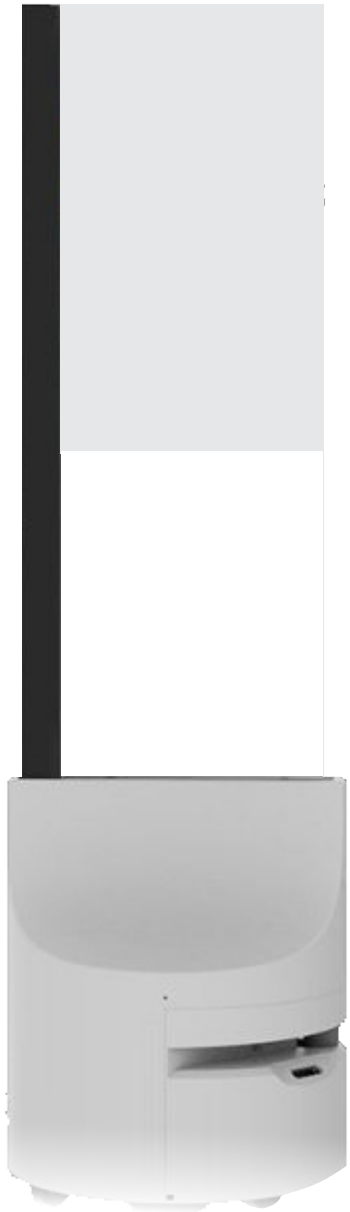

Transparent display	
Display size	30 inches
Backlight type	OLED
Display resolution	1366*768
Display scale	16 : 9
brightness	180-600cd/㎡ automatic adjustment
contrast	135000： 1
Viewing angle	178°/178°
Response time	0.1ms(Gray To Gray)
Color depth	10bit(R),1.07 billon colors
Configure the system	
Operation	RK3568
CPU	Quad-core Cortex-A55 clocked at up to 2.0GHz
memory	4G
storage	32G
operating system	Android 11
Touch mode	
Capacitive touch	10-point capacitive touch
Power Battery Parameters	
Power input (charger).	AC 220V
battery voltage	29.47V
Battery capacity	25.6V 25Ah
Charging method	Automatic recharge when low battery. You can also manually send back the pile command
Time required for a full	5.5 hours
Battery life	More than 2000 full charge and discharge cycles
The power consumption of the whole machine	＜150W
Work environment	
Runtime	7*12h (dynamic playback).
Operating temperature	0℃~40℃
Use humidity	20%~80%
Structure	
Material	Tempered glass & sheet metal
Dimensions	1750*500*500 (mm) See the structural dimension diagram for
Package size	TBD
Installation method:	Base mounting
Net/gross weight	115KG/130KG

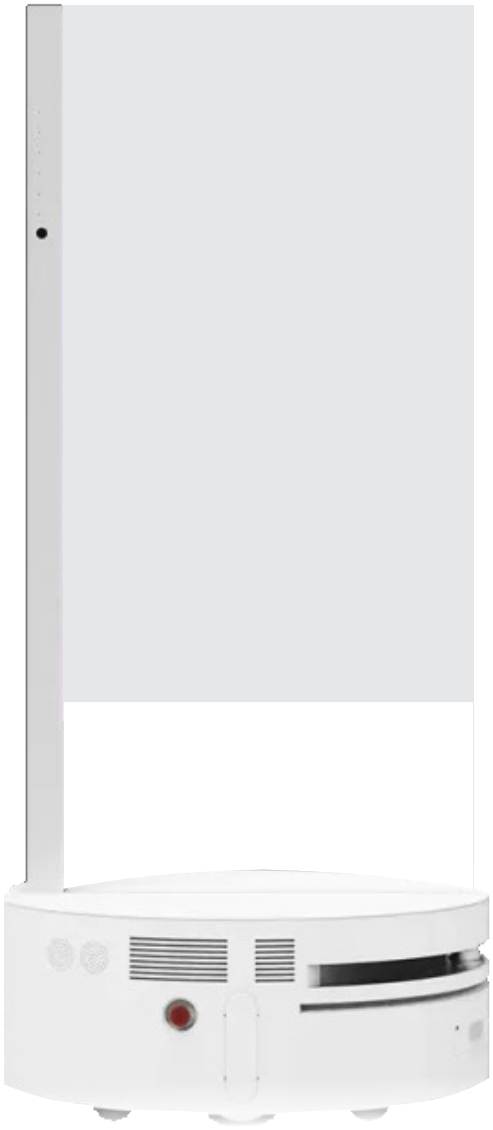

Transparent display	
Display size	55 inch
Backlight type	OLED
Display resolution	1920*1080
Display scale	16 : 9
brightness	200 -600cd/㎡ automatic adjustment
contrast	100000: 1
Viewing angle	178°/178°
Response time	0.1ms(Gray To Gray)
Color depth	10bit(R),1.07 billon colors
Configure the system	
Operation	RK3568
CPU	Quad-core Cortex-A55 clocked at up to 2.0GHz
memory	4G
storage	32G
operating system	Android 11
Touch mode	
Capacitive touch	10-point capacitive touch
Power Battery Parameters	
Power input (charger).	AC 220V
battery voltage	43.2V
Battery capacity	38.4V 25Ah
Charging method	Automatic recharge when low battery. You can also manually send back the pile command
Time required for a full	5.5 hours
Battery life	More than 2000 full charge and discharge cycles
The power consumption of the whole machine	＜150W
Work environment	
Runtime	7*12h (dynamic playback).
Operating temperature	0℃~40℃
Use humidity	20%~80%
Structure	
Material	Tempered glass & sheet metal
Dimensions	17775 * 770 * 572 (mm) See the structural dimension diagram for
Package size	TBD
Installation method:	Base mounting
Net/gross weight	113.5Kg (249.7 Lbs)